

General tolerances —

Part 2: Geometrical tolerances for features without individual tolerance indications

The European Standard EN 22768-2:1993 has the status of a
British Standard

UDC 621.713.14:744.4

Cooperating organizations

The European Committee for Standardization (CEN), under whose supervision this European Standard was prepared, comprises the national standards organizations of the following countries:

Austria	Oesterreichisches Normungsinstitut
Belgium	Institut belge de normalisation
Denmark	Dansk Standardiseringsraad
Finland	Suomen Standardisoimisliitto, r.y.
France	Association française de normalisation
Germany	Deutsches Institut für Normung e.V.
Greece	Hellenic Organization for Standardization
Iceland	Technological Institute of Iceland
Ireland	National Standards Authority of Ireland
Italy	Ente Nazionale Italiano di Unificazione
Luxembourg	Inspection du Travail et des Mines
Netherlands	Nederlands Normalisatie-instituut
Norway	Norges Standardiseringsforbund
Portugal	Instituto Português da Qualidade
Spain	Asociación Española de Normalización y Certificación
Sweden	Standardiseringskommissionen i Sverige
Switzerland	Association suisse de normalisation
United Kingdom	British Standards Institution

This British Standard, having been prepared under the direction of the Machine, Engineers and Hand Tools Standards Policy Committee, was published under the authority of the Standards Board and comes into effect on 15 July 1993

© BSI 03-1999

The following BSI references relate to the work on this standard:
Committee reference MTE/24
Draft for comment 87/78364 DC

ISBN 0 580 21934 8

Amendments issued since publication

Amd. No.	Date	Comments

Contents

	Page
Cooperating organizations	Inside front cover
National foreword	ii
Foreword	2
<hr/>	
Introduction	3
1 Scope	3
2 General	3
3 Normative references	3
4 Definitions	3
5 General geometrical tolerances	3
6 Indications on drawings	5
7 Rejection	5
<hr/>	
Annex A (informative) Concepts behind general tolerancing of geometrical characteristics	6
Annex B (informative) Further information	7
Annex ZA (normative) Normative references to international publications with their relevant European publications	10
<hr/>	
Figure B.1 — Principle of independency: maximum permissible deviations on the same feature	7
Figure B.2 — Examples of general tolerances on circularity	8
Figure B.3 — Parallelism deviation equal to the numerical value of the size tolerance	8
Figure B.4 — Parallelism deviation equal to the numerical value of the straightness tolerance	8
Figure B.5 — Examples of general tolerances on symmetry	8
Figure B.6 — Example of general tolerances on a drawing	9
<hr/>	
Table 1 — General tolerances on straightness and flatness	4
Table 2 — General tolerances on perpendicularity	4
Table 3 — General tolerances on symmetry	4
Table 4 — General tolerances on circular run-out	5
<hr/>	
National annex NA (informative) Committees responsible	Inside back cover

National foreword

This British Standard has been prepared under the direction of the Machine, Engineers and Hand Tools Standards Policy Committee and is the English language version of EN 22768-2:1993 *General tolerances — Part 2: Geometrical tolerances for features without individual tolerance indications*, published by the European Committee for Standardization (CEN). It is identical with ISO 2768-2:1989 published by the International Organization for Standardization (ISO).

A British Standard does not purport to include all the necessary provisions of a contract. Users of British Standards are responsible for their correct application.

Compliance with a British Standard does not of itself confer immunity from legal obligations.

Summary of pages

This document comprises a front cover, an inside front cover, pages i and ii, the EN title page, pages 2 to 10, an inside back cover and a back cover.

This standard has been updated (see copyright date) and may have had amendments incorporated. This will be indicated in the amendment table on the inside front cover.

UDC 621.713.14:744.4

Descriptors: Machine components, geometrical tolerances, machining tolerances, dimensional deviations, specifications

English version

General tolerances — Part 2: Geometrical tolerances for features without individual tolerance indications

(ISO 2768-2:1989)

Tolérances générales — Partie 2: Tolérances géométriques pour éléments non affectés de tolérances individuelles
(ISO 2768-2:1989)

Allgemeintoleranzen — Teil 2: Toleranzen für Form und Lage ohne einzelne Toleranzeintragung
(ISO 2768-2:1989)

This European Standard was approved by CEN on 1993-04-15. CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the Central Secretariat has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and United Kingdom.

CEN

European Committee for Standardization
Comité Européen de Normalisation
Europäisches Komitee für Normung

Central Secretariat: rue de Stassart 36, B-1050 Brussels

Foreword

In 1991, the International Standard ISO 2768-2:1989 *General tolerances — Part 2: Geometrical tolerances for features without individual tolerance indications* was submitted to the CEN Primary Questionnaire Procedure.

Following the positive result of the CEN/CS proposal, ISO 2768-2:1989 was submitted to the formal vote.

The result of the Formal Vote was positive.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by October 1993, and conflicting national standards shall be withdrawn at the latest by October 1993.

In accordance with the CEN/CENELEC Internal Regulations, the following countries are bound to implement this European Standard: Austria, Belgium, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland, United Kingdom.

NOTE The European references to international publications are given in annex ZA (normative).

Introduction

All features on component parts always have a size and a geometrical shape. For the deviation of size and for the deviations of the geometrical characteristics (form, orientation and location) the function of the part requires limitations which, when exceeded, impair this function.

The tolerancing on the drawing should be complete to ensure that the elements of size and geometry of all features are controlled, i.e. nothing shall be implied or left to judgement in the workshop or in the inspection department.

The use of general tolerances for size and geometry simplifies the task of ensuring that this prerequisite is met.

1 Scope

This part of ISO 2768 is intended to simplify drawing indications and specifies general geometrical tolerances to control those features on the drawing which have no respective individual indication. It specifies general geometrical tolerances in three tolerance classes.

This part of ISO 2768 mainly applies to features which are produced by removal of material. Its application to features manufactured by other processes is possible; however, special examination is required to ascertain whether the customary workshop accuracy lies within the general geometrical tolerances specified in this part of ISO 2768.

2 General

When selecting the tolerance class, the respective customary workshop accuracy has to be taken into consideration. If smaller geometrical tolerances are required or larger geometrical tolerances are permissible and more economical for any individual feature, such tolerances should be indicated directly in accordance with ISO 1101 (see clause A.2).

General geometrical tolerances in accordance with this part of ISO 2768 apply when drawings or associated specifications refer to this part of ISO 2768 in accordance with clause 6. They apply to features which do not have respective individual geometrical tolerance indications.

General geometrical tolerances apply to all geometrical tolerance characteristics, excluding cylindricity, profile of any line, profile of any surface, angularity, coaxiality, positional tolerances and total run-out.

In any event, general geometrical tolerances in accordance with this part of ISO 2768 should be used when the fundamental tolerancing principle in accordance with ISO 8015 is used and indicated on the drawing (see clause B.1).

3 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this part of ISO 2768. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this part of ISO 2768 are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 1101:1983, *Technical drawings — Geometrical tolerancing — Tolerancing of form, orientation, location and run-out — Generalities, definitions, symbols, indications on drawings*.

ISO 2768-1:1989, *General tolerances — Part 1: Tolerances for linear and angular dimensions without individual tolerance indications*.

ISO 5459:1981, *Technical drawings — Geometrical tolerancing — Datums and datum-systems for geometrical tolerances*.

ISO 8015:1985, *Technical drawings — Fundamental tolerancing principle*.

4 Definitions

For the purposes of this part of ISO 2768, the definitions for geometrical tolerances given in ISO 1101 and ISO 5459 apply.

5 General geometrical tolerances

(see also clause B.1)

5.1 Tolerances for single features

5.1.1 Straightness and flatness

The general tolerances on straightness and flatness are given in Table 1. When a tolerance is selected from Table 1, it shall be based, in the case of straightness, on the length of the corresponding line and, in the case of flatness, on the longer lateral length of the surface, or the diameter of the circular surface.

Table 1 — General tolerances on straightness and flatness

Values in millimetres

Tolerance class	Straightness and flatness tolerances for ranges of nominal lengths					
	up to 10	over 10 up to 30	over 30 up to 100	over 100 up to 300	over 300 up to 1 000	over 1 000 up to 3 000
H	0,02	0,05	0,1	0,2	0,3	0,4
K	0,05	0,1	0,2	0,4	0,6	0,8
L	0,1	0,2	0,4	0,8	1,2	1,6

5.1.2 Circularity

The general tolerance on circularity is equal to the numerical value of the diameter tolerance, but in no case shall it be greater than the respective tolerance value for circular radial run-out given in Table 4 (see examples in clause B.2).

5.1.3 Cylindricity

General tolerances on cylindricity are not specified.

NOTE 1 The cylindricity deviation comprises three components: circularity deviation, straightness deviation and parallelism deviation of opposite generator lines. Each of these components is controlled by its individually indicated or its general tolerance.

NOTE 2 If, for functional reasons, the cylindricity deviation has to be smaller than the combined effect (see clause B.3) of the general tolerances on circularity, straightness and parallelism, an individual cylindricity tolerance in accordance with ISO 1101 should be indicated for the feature concerned.

Sometimes, e.g. in the case of a fit, the indication of the envelope requirement \textcircled{E} is appropriate.

5.2 Tolerances for related features**5.2.1 General**

The tolerances specified in 5.2.2 to 5.2.6 apply to all features which are in relation to one another and which have no respective individual indication.

5.2.2 Parallelism

The general tolerance on parallelism is equal to the numerical value of the size tolerance or the flatness/straightness tolerance, whichever is the greater. The longer of the two features shall be taken as the datum; if the features are of equal nominal length, either may be taken as the datum (see clause B.4).

5.2.3 Perpendicularity

The general tolerances on perpendicularity are given in Table 2. The longer of the two sides forming the right angle shall be taken as the datum; if the sides are of equal nominal length, either may be taken as the datum.

Table 2 — General tolerances on perpendicularity

Values in millimetres

Tolerance class	Perpendicularity tolerances for ranges of nominal lengths of the shorter side			
	up to 100	over 100 up to 300	over 300 up to 1 000	over 1 000 up to 3 000
H	0,2	0,3	0,4	0,5
K	0,4	0,6	0,8	1
L	0,6	1	1,5	2

5.2.4 Symmetry

The general tolerances on symmetry are given in Table 3. The longer of the two features shall be taken as the datum; if the features are of equal nominal length, either may be taken as the datum.

NOTE The general tolerances on symmetry apply where

- at least one of the two features has a median plane, or
- the axes of the two features are perpendicular to each other.

See examples in clause B.5.

Table 3 — General tolerances on symmetry

Values in millimetres

Tolerance class	Symmetry tolerances for ranges of nominal lengths			
	up to 100	over 100 up to 300	over 300 up to 1 000	over 1 000 up to 3 000
H	0,5			
K	0,6	0,8	1	
L	0,6	1	1,5	2

5.2.5 Coaxiality

General tolerances on coaxiality are not specified.

NOTE The deviation in coaxiality may, in an extreme case, be as great as the tolerance value for circular radial run-out given in Table 4, since the deviation in radial run-out comprises the deviation in coaxiality and the deviation in circularity.

5.2.6 Circular run-out

The general tolerances on circular run-out (radial, axial and any surface of revolution) are given in Table 4.

For general tolerances on circular run-out, the bearing surfaces shall be taken as the datum if they are designated as such. Otherwise, for circular radial run-out, the longer of the two features shall be taken as the datum; if the features are of equal nominal length, either may be taken as the datum.

Table 4 — General tolerances on circular run-out

Values in millimetres

Tolerance class	Circular run-out tolerances
H	0,1
K	0,2
L	0,5

6 Indications on drawings

6.1 If general tolerances in accordance with this part of ISO 2768 shall apply in conjunction with the general tolerances in accordance with ISO 2768-1, the following information shall be indicated in or near the title block:

- “ISO 2768”;
- the tolerance class in accordance with ISO 2768-1;
- the tolerance class in accordance with this part of ISO 2768.

EXAMPLE

ISO 2768-mk

In this case the general tolerances for angular dimensions in accordance with ISO 2768-1 do not apply to right angles (90°), which are implied but not indicated, because this part of ISO 2768 specifies general tolerances on perpendicularity.

6.2 If the general dimensional tolerances (tolerance class m) shall not apply, the respective letter shall be omitted from the designation to be indicated on the drawing:

EXAMPLE

ISO 2768-K

In cases where the envelope requirement (E) also applies to all single features of size¹⁾, the designation “E” shall be added to the general designation specified in 6.1:

EXAMPLE

ISO 2768-mK-E

NOTE The envelope requirement (E) cannot apply to features with individually indicated straightness tolerances which are greater than their size tolerances, e.g. stock material.

7 Rejection

Unless otherwise stated, workpieces exceeding the general geometrical tolerance shall not lead to automatic rejection provided that the ability of the workplace to function is not impaired (see clause A.4).

¹⁾ For the purposes of this part of ISO 2768, a single feature of size comprises a cylindrical surface or two parallel plane surfaces.

Annex A (informative)

Concepts behind general tolerancing of geometrical characteristics

A.1 General tolerances should be indicated on the drawing by reference to this part of ISO 2768 in accordance with clause 6.

The values of general tolerances correspond to grades of customary workshop accuracy, the appropriate tolerance class being selected and indicated on the drawing.

A.2 Above a certain tolerance value, which corresponds to the customary workshop accuracy, there is usually no gain in manufacturing economy by enlarging the tolerance. In any event, workshop machinery and the usual workmanship normally do not manufacture features with greater deviations. For example, a feature of 25 mm \pm 0,1 mm diameter by 80 mm long manufactured in a workshop with a customary accuracy equal to or finer than ISO 2768-mH contains the geometrical deviations well within 0,1 mm for circularity, 0,1 mm for straightness of surface elements, and 0,1 mm for circular radial run-out (the values given have been taken from this part of ISO 2768). Specifying tolerances would be of no benefit in this particular workshop.

However, if, for functional reasons, a feature requires a smaller tolerance value than the “general tolerances”, then that feature should have the smaller tolerance indicated individually adjacent to the particular feature. This type of tolerance falls out-side the scope of general tolerances.

In cases where the function of a feature allows a geometrical tolerance equal to or larger than the general tolerance values, this should not be individually indicated, but should be stated on the drawing as described in clause 6. This type of tolerance allows full use of the concept of general geometrical tolerancing.

There will be “exceptions to the rule” where the function allows a larger tolerance than the general tolerances, and the larger tolerance will provide a gain in manufacturing economy. In these special cases, the larger geometrical tolerance should be indicated individually adjacent to the particular feature, e.g. the circularity tolerance of a large and thin ring.

A.3 Using general geometrical tolerances leads to the following advantages:

- a) drawings are easier to read and thus communication is made more effective to the user of the drawing;

- b) the design draughtsman saves time by avoiding detailed tolerance calculations as it is sufficient only to know that the function allows a tolerance greater than or equal to the general tolerance;

- c) the drawing readily indicates which features can be produced by normal process capability, which also assists quality engineering by reducing inspection levels;

- d) those features remaining, which have individually indicated geometrical tolerances, will, for the most part, be those controlling features for which the function requires relatively small tolerances and which therefore may cause special effort in the production — this will be helpful for production planning and will assist quality control services in their analysis of inspection requirements;

- e) purchase and subcontract supply engineers can negotiate orders more readily since the “customary workshop accuracy” is known before the contract is placed; this also avoids arguments on delivery between the buyer and the supplier, since in this respect the drawing is complete.

These advantages are fully obtained only when there is sufficient reliability that the general tolerances will not be exceeded, i.e. when the customary workshop accuracy of the particular workshop is equal to or finer than the general tolerances indicated in the drawing.

The workshop should, therefore,

- find out by measurements what its customary workshop accuracy is;
- accept only those drawings having general tolerances equal to or greater than its customary workshop accuracy;
- check by sampling that its customary workshop accuracy does not deteriorate.

Relying on undefined “good workmanship” with all its uncertainties and misunderstandings is no longer necessary with the concept of general geometrical tolerances. The general geometrical tolerances define the required accuracy of “good workmanship”.

A.4 The tolerance the function allows is often greater than the general tolerance. The function of the part is, therefore, not always impaired when the general tolerance is (occasionally) exceeded at any feature of the workpiece. Exceeding the general tolerance should lead to a rejection of the workpiece only if the function is impaired.

Annex B (informative) Further information

B.1 General geometrical tolerances (see clause 5)

According to the principle of independency (see ISO 8015), general geometrical tolerances apply independently of the actual local size of the workpiece features. Accordingly, the general geometrical tolerances may be used even if the features are everywhere at their maximum material size (see Figure B.1).

If the envelope requirement (E) is individually indicated adjacent to the feature or generally to all features of size as described in clause 6, this requirement should also be complied with.

B.2 Circularity (see 5.1.2) — Examples

EXAMPLE 1 (see Figure B.2)

The permissible deviation of the diameter is indicated directly on the drawing; the general tolerance on circularity is equal to the numerical value of the diameter tolerance.

EXAMPLE 2 (see Figure B.2)


The general tolerances in accordance with the indication ISO 2768-mK apply. The permissible deviations for the diameter of 25 mm are $\pm 0,2$ mm. These deviations lead to the numerical value of 0,4 mm which is greater than the value of 0,2 mm given in Table 4; the value of 0,2 mm, therefore, applies for the circularity tolerance.

B.3 Cylindricity (see note 2 in 5.1.3)

The combined effect of the general tolerances of circularity, straightness and parallelism is, for geometrical reasons, smaller than the sum of the three tolerances since there is also a certain limitation by the size tolerance. However, for the sake of simplicity, in order to decide whether the envelope requirement (E) or an individual cylindricity tolerance is to be indicated, the sum of the three tolerances can be taken into account.

B.4 Parallelism (see 5.2.2)

Depending on the shapes of the deviations of the features, the parallelism deviation is limited by the numerical value of the size tolerance (see Figure B.3) or by the numerical value of the straightness or flatness tolerance (see B.4).

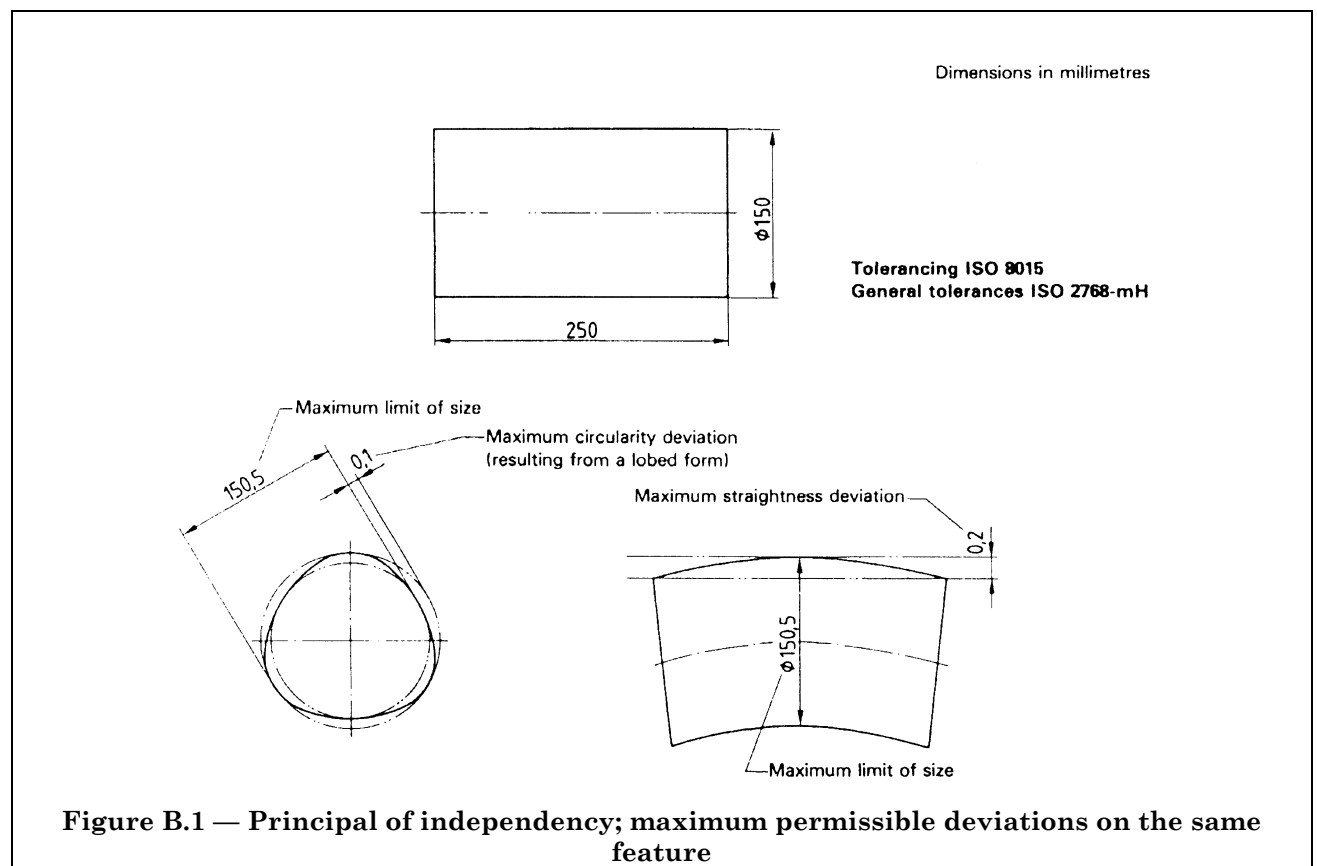

B.5 Symmetry (see 5.2.4) — Examples

Values in millimetres





Example	Indication on the drawing	Circularity tolerance zone
1	 <p>ISO 2768-K</p>	
2	 <p>ISO 2768-mK</p>	

Figure B.2 — Examples of general tolerances on circularity

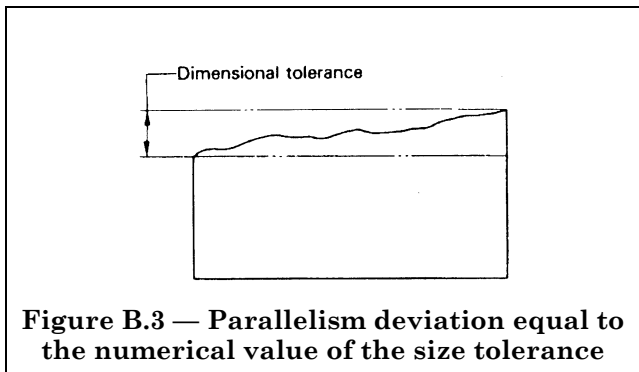


Figure B.3 — Parallelism deviation equal to the numerical value of the size tolerance

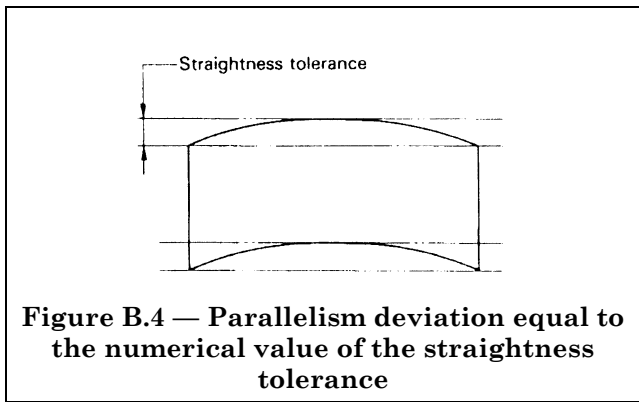


Figure B.4 — Parallelism deviation equal to the numerical value of the straightness tolerance


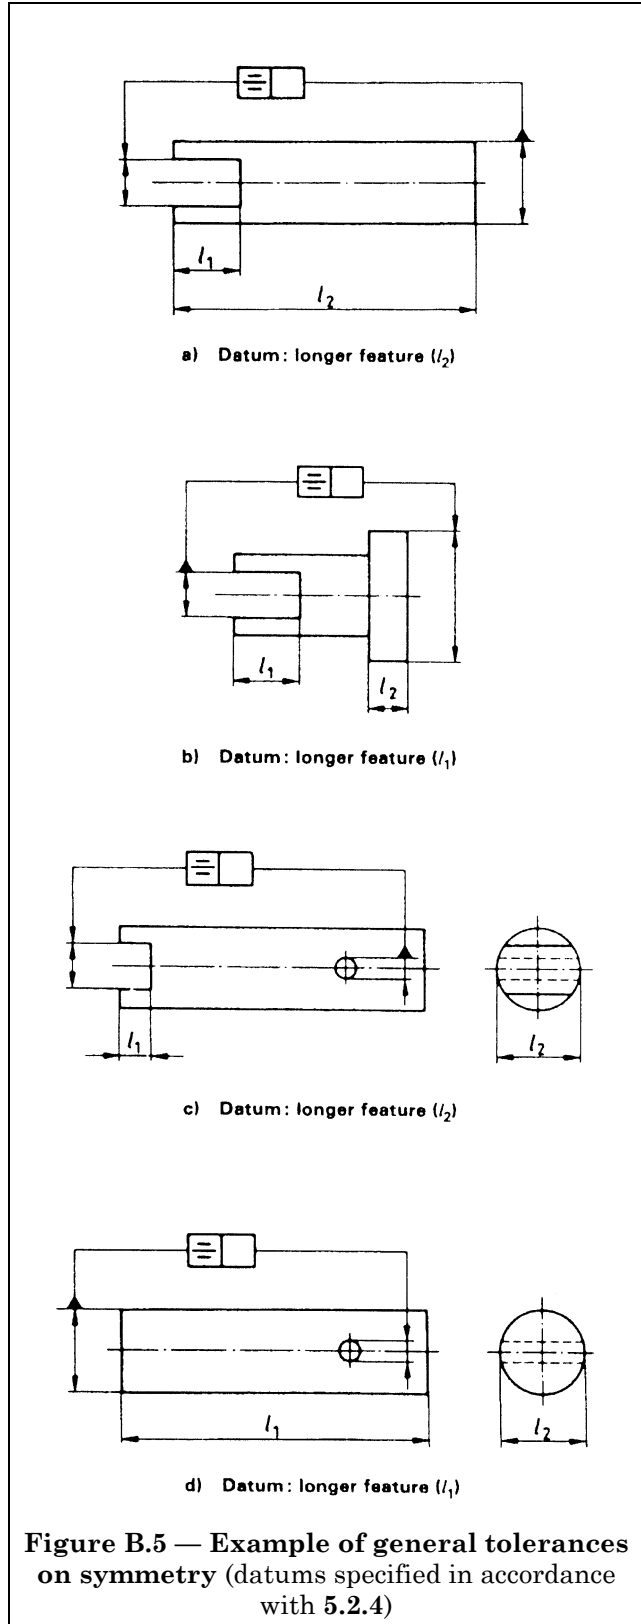


Figure B.5 — Example of general tolerances on symmetry (datums specified in accordance with 5.2.4)

B.6 Example of a drawing

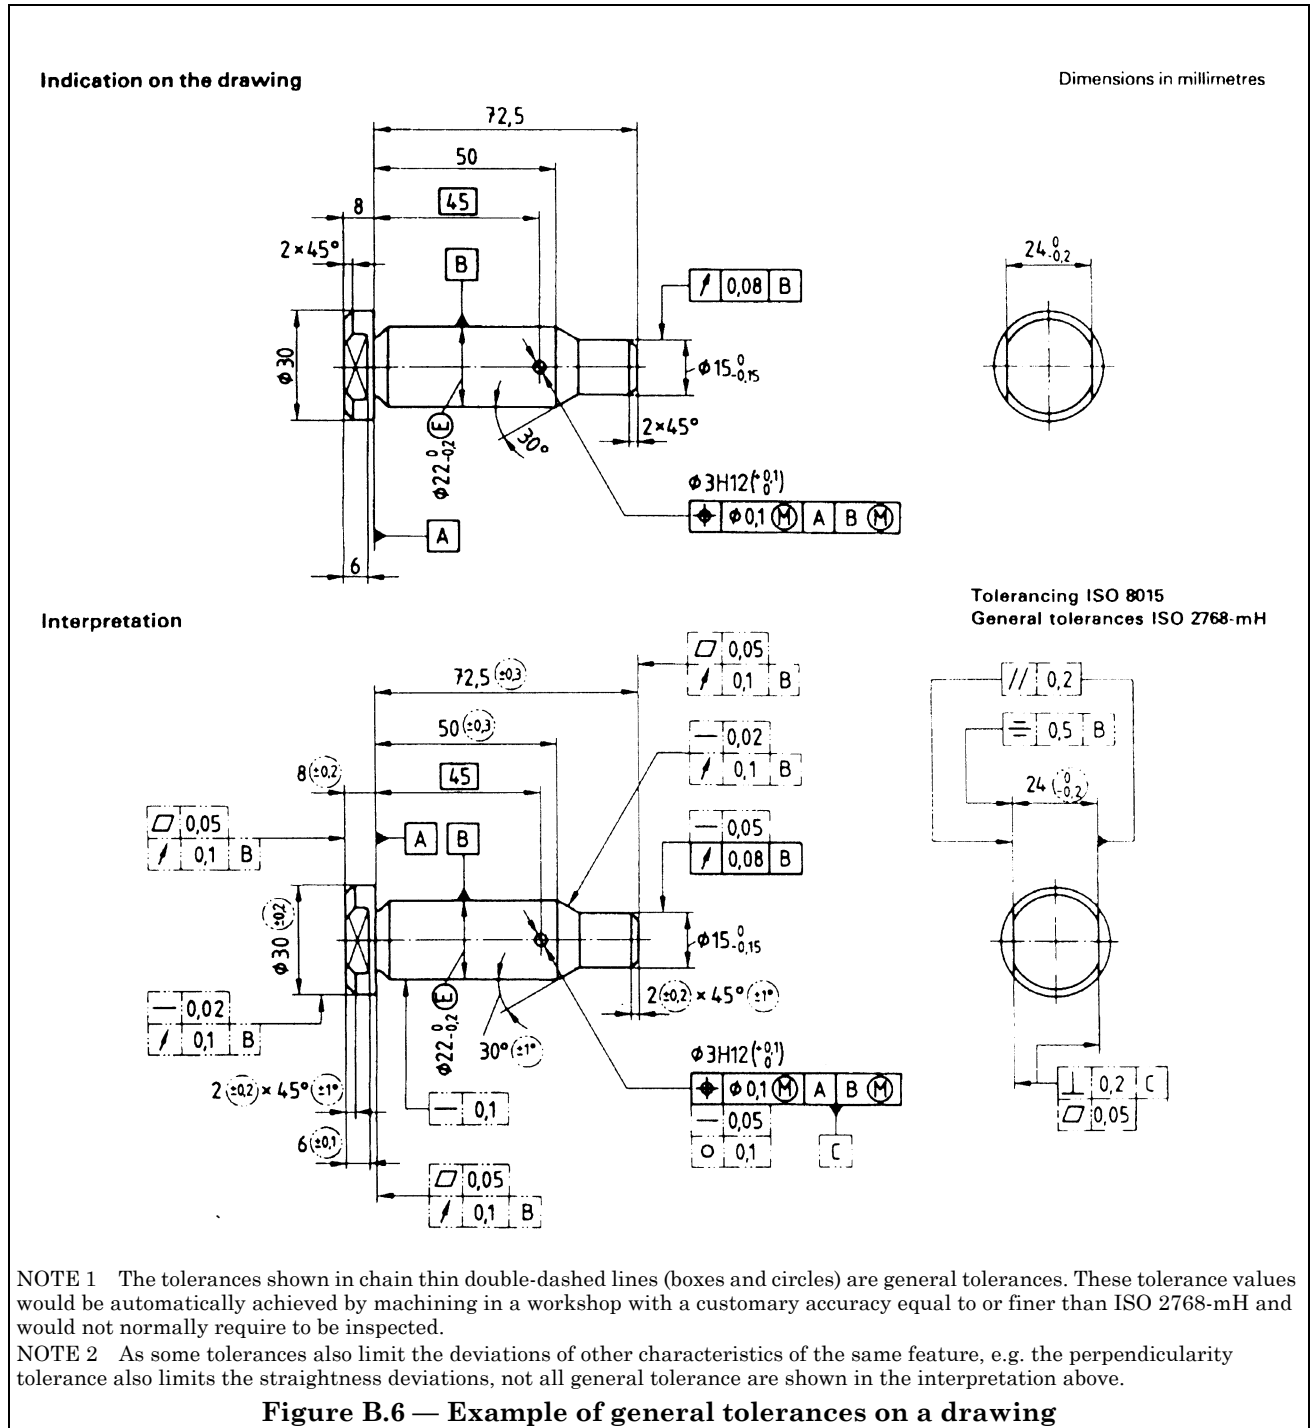

Annex ZA (informative)**Normative references to international publications with their relevant European publications**

This European Standard incorporates by dated or undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this European Standard only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies (including amendments).

Publication	Title	EN/HD
ISO 1101	<i>Technical drawings — Geometrical tolerancing — Tolerances of form, orientation, location and run-out — Generalities, definitions, symbols, indications on drawings</i>	
ISO 2768-1	<i>General tolerances — Part 1: Tolerances for linear and angular dimensions without individual tolerance indications</i>	EN 22768-1
ISO 5459	<i>Technical drawings — Geometrical tolerancing — Datums and datum-systems for geometrical tolerances</i>	
ISO 8015	<i>Technical drawings — Fundamental tolerancing principle</i>	

National annex NA (informative)

Committees responsible

The United Kingdom participation in the preparation of this European Standard was entrusted by the Machine, Engineers and Hand Tools Standards Policy Committee (MTE/-) to Technical Committee MTE/24, upon which the following bodies were represented:

British Cast Iron Research Association
British Electrical and Allied Manufacturers' Association
British Foundry Association
Federation of British Engineers Tool Manufacturers
Railway Industry Association of Great Britain
Society of British Aerospace Companies Ltd.
Society of Motor Manufacturers and Traders Ltd.
Zinc Development Association
Coopted members

BSI — British Standards Institution

BSI is the independent national body responsible for preparing British Standards. It presents the UK view on standards in Europe and at the international level. It is incorporated by Royal Charter.

Revisions

British Standards are updated by amendment or revision. Users of British Standards should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using this British Standard would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover. Tel: 020 8996 9000. Fax: 020 8996 7400.

BSI offers members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of standards.

Buying standards

Orders for all BSI, international and foreign standards publications should be addressed to Customer Services. Tel: 020 8996 9001. Fax: 020 8996 7001.

In response to orders for international standards, it is BSI policy to supply the BSI implementation of those that have been published as British Standards, unless otherwise requested.

Information on standards

BSI provides a wide range of information on national, European and international standards through its Library and its Technical Help to Exporters Service. Various BSI electronic information services are also available which give details on all its products and services. Contact the Information Centre. Tel: 020 8996 7111. Fax: 020 8996 7048.

Subscribing members of BSI are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration. Tel: 020 8996 7002. Fax: 020 8996 7001.

Copyright

Copyright subsists in all BSI publications. BSI also holds the copyright, in the UK, of the publications of the international standardization bodies. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI.

This does not preclude the free use, in the course of implementing the standard, of necessary details such as symbols, and size, type or grade designations. If these details are to be used for any other purpose than implementation then the prior written permission of BSI must be obtained.

If permission is granted, the terms may include royalty payments or a licensing agreement. Details and advice can be obtained from the Copyright Manager. Tel: 020 8996 7070.